




Description

AIRMOD DUO double suspension light with surface-mounted power supply box (Stefan Diez design). CHAMPAGNE finishing. Equipped with an interchangeable perforated collimator GRID, CHAMPAGNE finishing. Two low-voltage heads, diameter 100, can be oriented through 360° thanks to a nickel-plated copper double hoop. Champagne anodised aluminium fin passive heat sink. Interchangeable perforated tubular collimator in champagne anodised aluminium.

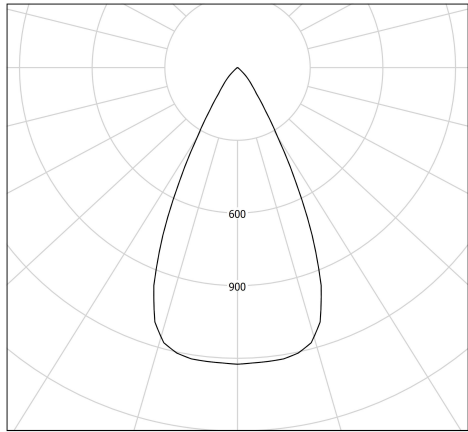


cd — C0 - C180 - - - C90 - C270 1 head : 900 lm

Light specifications and controlling

- CoB LED Module 900 lm (without endcap), IRC>90, 2700 K, 3 SDCM
- Interchangeable optics unit composed of a mixing chamber and a Wide Beam 50° glass lens
- Constant Current Driver (non-dimmable)

Installation and maintenance

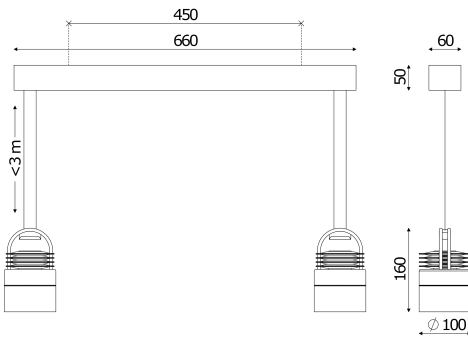

- Dimensions : Head : $\varnothing 100 \times 160$ mm, Box : $660 \times 50 \times 60$ mm
- Box in anodised aluminium containing a 220-240 V 50/60 Hz power supply and a $3 \times 2.5 \text{ mm}^2$ terminal block
- For surface mounting via 2 x M3 screws with centre distance 450 mm (not supplied).
- Suspension wires adjustable in height, up to 3 m.



Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -5 °C to +35 °C
- Protection : IP20
- Electrical class: Class I
- Power consumption: 26 W
- Photobiological hazard: Group 1
- Fire resistance: 850 °C
- Weight: 2,08 kg
- Designed and made in France and Germany