




## Description

- WEREFKIN 133 360° impervious suspended tubular light fitting for direct/indirect lighting
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 304L
- Passive heat sink in aluminium
- Gear tray: Internal white lacquered steel gear tray
- Gaskets: Gaskets moulded in EPDM

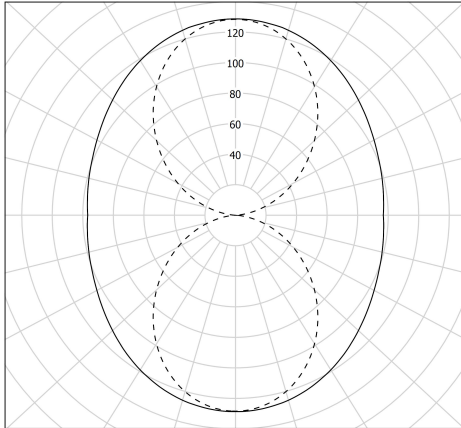


cd/klm  
 — C0 - C180    - - - C90 - C270     $\eta = 100\%$

## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 6000 lm
- Colour temperature: 3000 K
- Specific satin-finish primary diffuser optic
- Constant Current Driver (non-dimmable)

## Installation and maintenance

- Diameter: 133 mm
- Total length: 1295 mm
- Cable entry with nickel-coated brass cable gland for cable  $\varnothing$  5 - 14 mm
- Connection to a 3 x 2.5 mm<sup>2</sup> disconnectable terminal block
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Provided with 2 suspension kits including: A ceiling-mounting system, 3m of  $\varnothing$ 1.2mm steel wire and self-locking adjustable fixing system for bolt fitted fixing strap
- Quick opening and closing with just one screw
- Patented SLIDE maintenance system
- Removable LED modules and driver



## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -20 °C to +35 °C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class II
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 59 W
- Photobiological hazard: Group 0
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 5,7 kg