


Description

- Gericault ceiling light fitting for diffuse lighting
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- End caps, fixing straps,: Stainless Steel 304L
- Passive heat sink in aluminium
- Gaskets: Gaskets moulded in EPDM

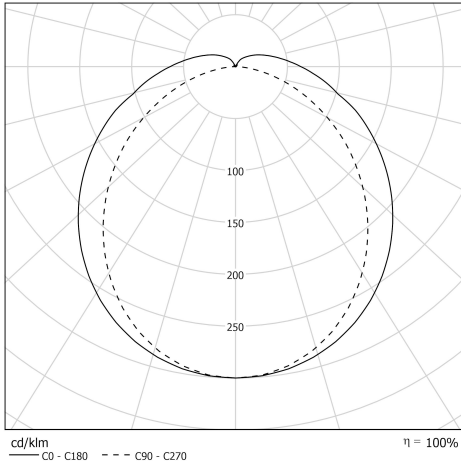


Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 4600 lm
- Colour temperature: 3000 K
- Brightness management using a diffuser housing
- Light mixing chamber
- UGR ≤ 25 (Ceiling or suspended light fitting)
- Constant Current DALI 2-addressable Driver

Installation and maintenance

- Diameter: 100 mm
- Total length: 1318 mm
- Cable entry with nickel-coated brass cable gland for cable $\varnothing 5 - 14$ mm
- Connection to a 5×2.5 mm² disconnectable terminal block
- 2 Stainless Steel fixing straps (with variable centre distance)
- Quick opening and closing with just one screw
- Patented SLIDE maintenance system
- Easily removable LED modules and driver



Characteristics

- Warranty : 8 years
- 70 000 h L80/B10 at 25°C
- Operating temperature: -25 °C to +35 °C
- Imperviousness: IP66, IP68 and IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class II
- Supply voltage: 220-240V 0/50/60Hz
- Power consumption: 38 W
- Luminous efficacy: 121 lm/W
- Power factor > 0,95
- THD: 11 %
- Inrush current - I_{peak}: 17 A
- Photobiological hazard: Group 0
- Peak duration - T_{width}: 170 μ s
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 28 pcs
- Weight: 3,4 kg