




## Description

- NILAK wall mounting fitting with frosted effect films and push-button (design Yann Kersalé)
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 304L
- One-way mirror and prismatic films
- Gaskets: Gaskets moulded in EPDM

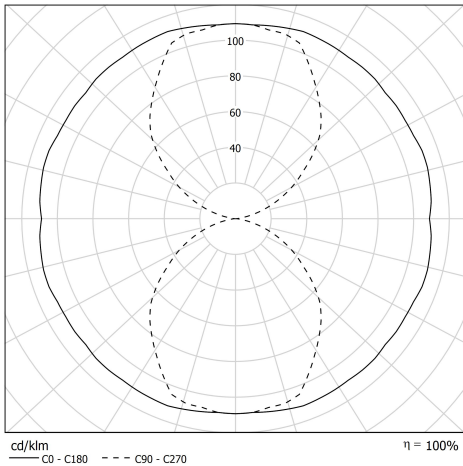


## Light specifications and controlling

- Luminous flux: 800 lm
- Colour temperature: 2700 K
- Dimming: Built-in dimming button

## Installation and maintenance

- Diameter: 100 mm
- Total length: 400 mm
- 2 Stainless Steel fixing straps (with variable centre distance)
- Supplied with 2 stainless steel wall mounting brackets to be screwed on the wall (screws are not supplied), acting as hooks to receive the fixing straps

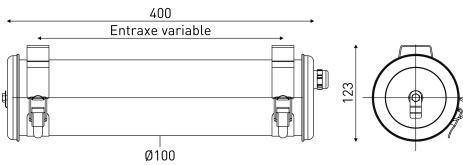

## Characteristics

- Warranty : 5 years
- Operating temperature: -20°C to +30°C
- Protection: IP68
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240V 50/60Hz
- Power consumption: 20 W
- Inrush current - Ipeak: 32 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 240 µs
- T°C with incandescent wires: 650°C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 2,2 kg
- Designed and made in France