




Description

- MAXWELL 100 self-contained tubular emergency light fitting
- End-caps ½ ring press-formed
- Ø100 mm special satin-finish polycarbonate diffuser for LED luminaires
- White powder-coated mounting plate attached to the alimentation end cap
- NiMH battery
- Moulded EPDM gaskets
- Compliant to EN 60 598-2-22
- 1 hour autonomy

Light specifications and controlling


- High efficient dismountable LED module
- Assigned flux: 440 lm
- Colour temperature: 4000 K
- DALI-addressable LED driver

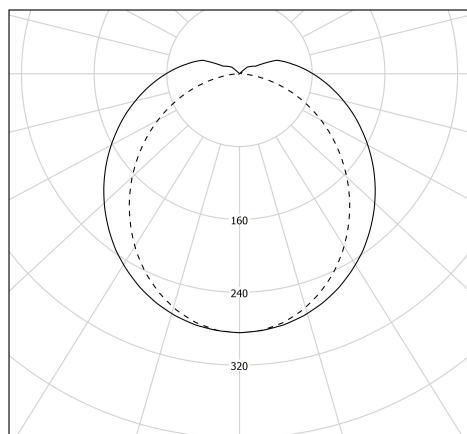

cd/klm
C0 - C180 - - - C90 - C270
η = 100%

Installation and maintenance

- Diameter: 100 mm
- Total length: 385 mm
- 1 cable gland in nickel-plated brass (capacity: Ø5 to 14 mm)
- Connection to 6x2,5mm² terminal block
- 2 reinforced fixing straps in stainless steel with variable centre distance and allowing 360° orientation
- Maintenance by releasing the closing screw and extracting the diffuser

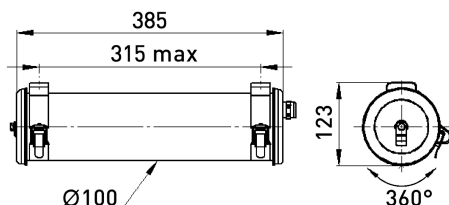

Characteristics

- Warranty : 5 years 24/7 use at max temp (excluding batteries)
- Operating temperature: 0°C +40°C
- Protection: IP68
- Resistance to IK shocks: IK10
- Class I
- Supply voltage: 220-240V 50/60Hz
- Standby consumption : 1,7W
- Inrush current - I_{peak}: 20 A
- Peak duration - T_{width}: 120 µs
- T°C with incandescent wires: 960°C
- Weight: 1,9 kg
- Designed and made in France

