




## Description


- BODOM Floor lamp
- Color: COAL (RAL 7021)
- Internal anodized finishing aluminum gear unit cover : COPPER
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 316L painted COAL (RAL 7021)
- Longitudinal louvre in coppery aluminum with inclined lamina
- Louvre with inclined lamina : COPPER
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- Structure: COAL (RAL 7021) powder-coated aluminium with anti-corrosion treatment
- Fiber-reinforced concrete stabilisation base
- Gaskets: Gaskets moulded in EPDM

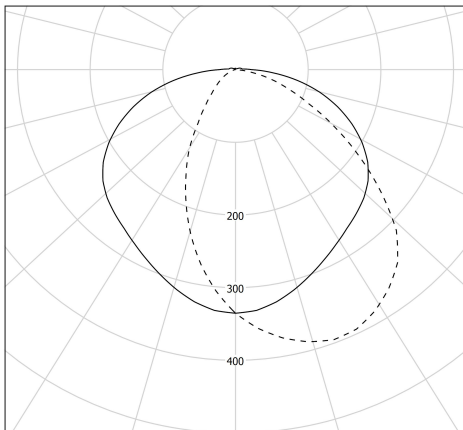

cd/klm  
 — C0 - C180    - - - C90 - C270     $\eta = 100\%$


## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 700 lm
- Colour temperature: 2700 K
- Dimming: Dim switch on cable

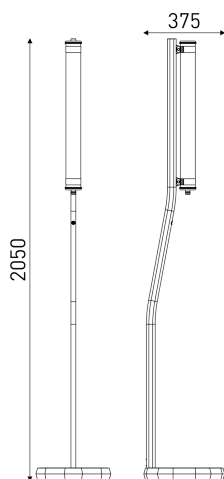

## Installation and maintenance

- Luminary : diameter 70 mm, length 695 mm
- Height of the structure : 2050 mm
- Base : 375 x 375 mm
- Provided with 6m 5G1,5 cable with tinned copper meshwork under transparent tubing with a european plug IP44
- Patented system with automatic electrical connection/disconnection on closure
- Easily removable LED modules and driver

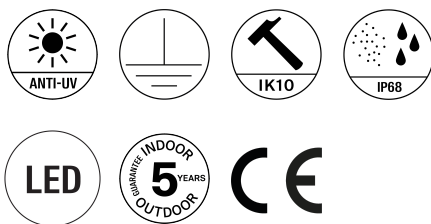

## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -20°C to +30°C
- Protection: IP68
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240V 50/60Hz
- Power consumption: 12 W
- Inrush current - Ipeak: 13,6 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 304  $\mu$ s
- Fire resistance: 650 °C
- Weight: 22 kg