




## Description

- MONDRIAN tubular light fitting for diffuse lighting
- 180° light distribution
- External 304L stainless steel gear unit cover
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- White powder-coated mounting plate
- Gaskets: Gaskets moulded in EPDM


## Light specifications and controlling

- High-efficiency removable LED modules (IRC>90, 3 SDCM)
- Luminous flux: 1500 lm
- Colour temperature: 3000 K
- Brightness management using a diffuser housing
- Light mixing chamber
- Constant Current Driver (non-dimmable)

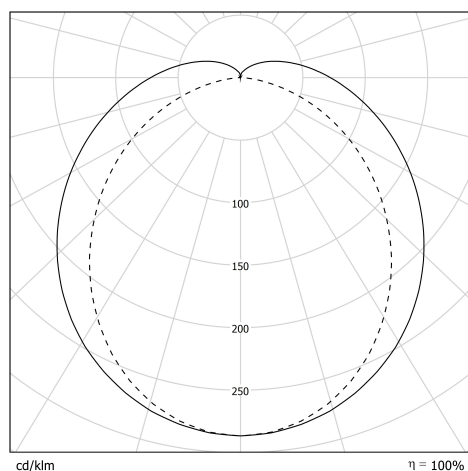

## Installation and maintenance

- Diameter: 40 mm
- Length illuminating surface: 886 mm
- Total length: 1256 mm
- Cable entry with nickel-coated brass cable gland for cable Ø 5 - 10 mm
- Connection to a 2 x 2,5 mm<sup>2</sup> fixed terminal block
- 2 fixing straps in stainless steel with HSHC screw in A2 stainless steel with variable centre distance and allowing 360° orientation
- Fixing as wall or ceiling light fitting with 2 304L stainless steel straps
- Opening and closing by tightening the nut on the cable gland
- Installation vertical: position cable gland positioned downwards
- Maintenance by removal of the end cap and the gear tray
- Easily removable LED modules and driver



## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at max. operating temperature
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Class II
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 16 W
- Inrush current - I<sub>peak</sub>: 32 A
- Photobiological hazard: Group 0
- Peak duration - T<sub>width</sub>: 240 µs
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 1,1 kg
- Designed and made in France

