


BELLEVILLE NANO

80230026
BELLEVILLE 70 360° S 300 CL1 PY
Compact wall light fitting



Description

- BELLEVILLE 70 360° compact wall light fitting (design : Normal Studio)
- For ambient lighting with trapezoid base perforation grid
- Grid with SILVER finishing
- Housing: borosilicate-glass diffuser for inside/outside use
- End caps & fixing straps: Stainless steel 304L
- Silver anodised aluminium grid inserted inside the housing
- E14 socket fixed on the dismantlable end cap
- Gaskets: Gaskets moulded in EPDM

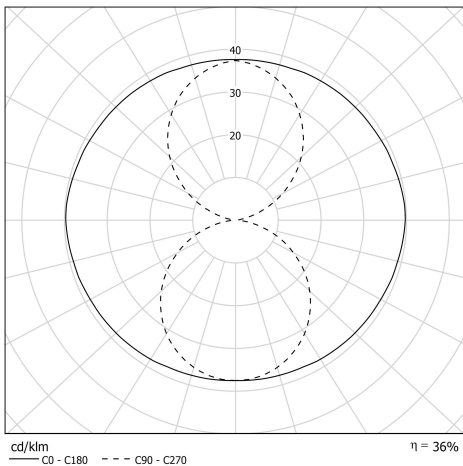


Light specifications and controlling

- 1 E14 9W max lamp, 50mm max diameter, not included
- Luminous flux: 110 lm
- non dimmable

Installation and maintenance

- Diameter: 70 mm
- Total length: 270 mm
- Connection to 3x2.5mm² automatic terminal block
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Installation in vertical position, cable gland positioned downwards
- Maintenance by removal of the end cap



Characteristics

- Warranty : 5 years
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK07
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- T°C with incandescent wires: non-flammable
- Weight: 0,86 kg
- Designed and made in France

