


VENDOME MINI

80310130
VENDOME 100 2L COAL P 500 CL1
Tubular wall light



Description


- Tubular wall light VENDOME 100 2L (design: Normal Studio)
- Honeycomb perforation grid
- Grid with COAL finishing
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 304L
- Anodised aluminium reflector : PETROL
- Coal-coloured (RAL 7021) painted aluminium grid inserted inside the housing
- Stainless steel gear tray with 2 porcelaine sockets E14
- Gaskets: Gaskets moulded in EPDM

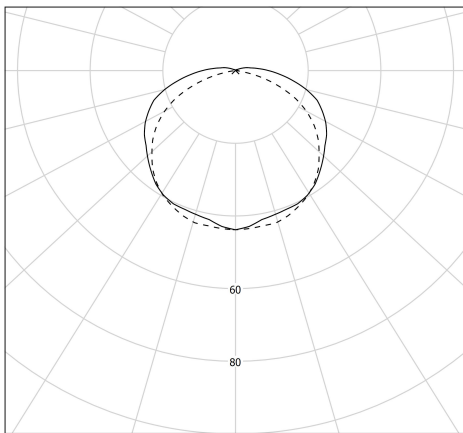

cd/klm
— C0 - C180 - - - C90 - C270 $\eta = 17\%$

Light specifications and controlling

- 2 E14 11W max lamps, not included
- non dimmable

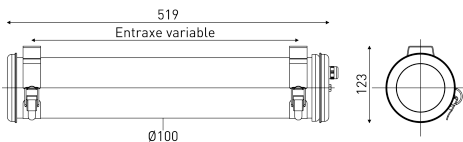

Installation and maintenance

- Diameter: 100 mm
- Total length: 519 mm
- Connection to 3x2.5mm² automatic terminal block
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Installation in vertical position, cable gland positioned downwards



Characteristics

- Warranty : 5 years
- Operating temperature: -20 °C to +35 °C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- T°C with incandescent wires: 650°C
- Weight: 1,6 kg
- Designed and made in France

