




## Description

- QUADRATUBE collection (design Jean Michel Wilmotte)
- Suspended fitting P2 with inclined slats louvre, "Couture" perforations
- made of brushed champagne anodised aluminium
- Black powder-coated aluminum end caps & straps (RAL 9005)
- Black laquered steel gear cover (RAL 9005)
- Crystal quality PMMA body with a rectangular 135 x 85 mm section
- Reflector with slatted louvre

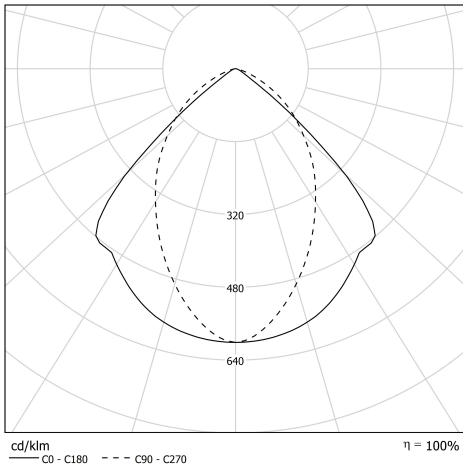


## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 3110 lm
- Colour temperature: 2700 K
- Specific satin-finish primary diffuser optic
- UGR ≤ 19
- Longitudinal eye protection angle (louvre): 44°
- Transversal eye protection angle (louvre): 31°
- Driver with constant current output, dimmable by Bluetooth Casambi

## Installation and maintenance

- Total length: 1316 mm
- Supplied with a 3G0.75 black 3 m cable
- Stripped free end
- Supplied with black suspension wires integrating: a ceiling hanging system, a 3 m Ø 1 mm steel wire and a strap-based fixing system with an adjustment mechanism
- Perform maintenance by loosening the 4 screws in the straps and removing the gear tray
- Removable LED modules and driver

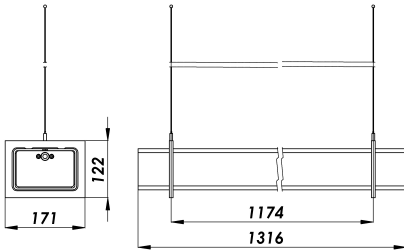

## Characteristics

- Warranty : 8 years
- 70,000h L80/B10 at 35°
- Operating temperature: 0°C +35°C
- Imperviousness: IP20, for indoor use
- Class I
- Power supply: 220-240V 50/60Hz
- Power consumption: 40 W
- Power factor > 0,95
- THD: 5 %
- Photobiological hazard: Group 1
- Inrush current - Ipeak: 24,1 A
- Peak duration - Twidth: 181 µs
- Number of luminaires on automat type B16: 32 pcs
- T°C with incandescent wires: 650°C
- Weight: 6,3 kg
- Designed and made in France