


Description

- QUADRATUBE collection (design Jean Michel Wilmotte)
- W3 (Serie L) wall light with a micro-perforated louvre
- in black lacquered sheet metal (RAL 9005)
- Borosilicate glass body with a rectangular 86 x 57 mm section
- Frosted polycarbonate end cap
- Black (RAL 9005) lacquered metal fixing structure
- Wall-mounted gear tray attachment (screws not supplied)

Light specifications and controlling


- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 820 lm
- Colour temperature: 2700 K
- Specific satin-finish primary diffuser optic
- Visual comfort thanks to a microperforated sheet metal louvre
- Driver with constant current output, dimmable by Bluetooth Casambi

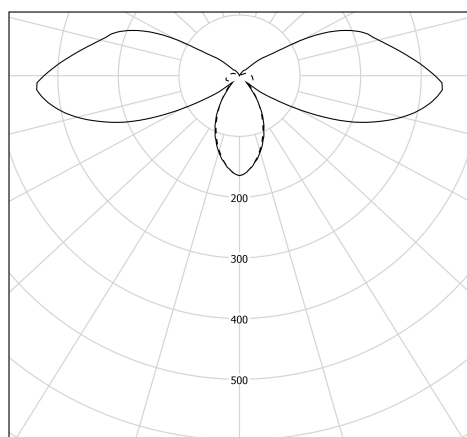

cd/klm
 — C0 - C180 - - - C90 - C270 η = 100%

Installation and maintenance

- Total length: 680 mm
- Total width: 120 mm
- Connection to 3x2.5mm² automatic terminal block
- Perform driver maintenance by loosening the 4 screws in the fixing structure
- Removable LED modules and driver

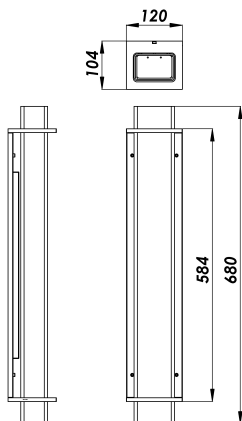

Characteristics

- Warranty : 8 years
- 70,000h L80/B10 at 35°
- Operating temperature: 0°C +35°C
- Imperviousness: IP20, for indoor use
- Class I
- Power supply: 220-240V 50/60Hz
- Power consumption: 20 W
- Power factor > 0,95
- THD: 10 %
- Photobiological hazard: Group 1
- Inrush current - Ipeak: 20,4 A
- Peak duration - Twidth: 195 μs
- Number of luminaires on automat type B16: 24 pcs
- Fire resistance: 960 °C
- Weight: 3,35 kg
- Designed and made in France

