




Gounod 133  
© SAMMODE

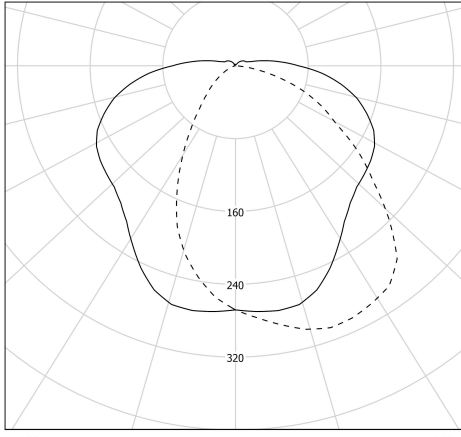

cd/klm  
— C0 - C180 - - - C90 - C270  $\eta = 100\%$

## Description


- GOUNOD Vertical wall light fitting with flux turned to the ground
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 304L
- Longitudinal louvre in scratch brushed silver aluminium with inclined lamina
- Gear tray: Internal grey lacquered steel gear tray RAL 9006
- Gaskets: Gaskets moulded in EPDM

## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 2700 lm
- Colour temperature: 2700 K
- Specific satin-finish primary diffuser optic
- Constant Current Driver (non-dimmable)

## Installation and maintenance

- Diameter: 133 mm
- Total length: 995 mm
- Cable entry with nickel-coated brass cable gland for cable  $\varnothing$  5 - 14 mm
- Connection to a 3 x 2.5 mm<sup>2</sup> disconnectable terminal block
- 2 reinforced fixing straps in stainless steel with variable centre distance and allowing 360° orientation
- Closing by tightening the nut on the cable gland
- Quick opening and closing with just one screw
- Maintenance by removing the end cap and sliding the guided gear plate
- Installation vertical: position cable gland positioned downwards
- Easily removable LED modules and driver

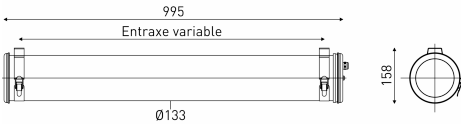

## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -20 °C to +35 °C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Class II
- Supply voltage: 220-240V 0/50/60Hz
- Power consumption: 31 W
- Luminous efficacy: 87 lm/W
- Power factor > 0,9
- THD: 20 %
- Inrush current - Ipeak: 32 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 240  $\mu$ s
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 1,9 kg