


## Description

- PAULI 133 HT200 tubular light fitting for high-temperature lighting
- End-caps ½ ring press-formed
- Ø135 mm borosilicate-glass diffuser
- Stainless steel mounting plate
- Moulded high temperature silicone gaskets
- High temperature internal wiring with silicone isolation braided with glass fibre

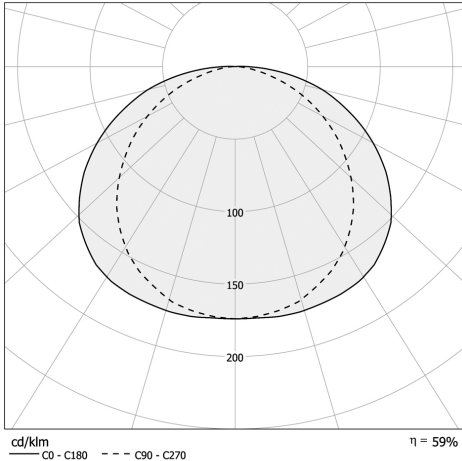


## Light specifications and controlling

- E27 lampholder
- 2x
- 60W
- Luminous flux: 780 lm
- without lamp

## Installation and maintenance

- Diameter: 133 mm
- Total length: 677 mm
- 1 cable gland in nickel-plated brass (capacity: Ø5 to 8 mm)
- Connection to 3x2,5mm<sup>2</sup> terminal block
- 2 reinforced fixing straps in stainless steel with variable centre distance and allowing 360° orientation
- Maintenance by releasing the 2 closing screws, removing the end cap and extracting the gear tray

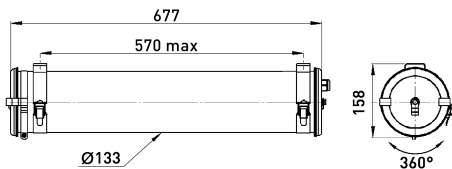

## Characteristics

- Warranty : 5 years
- Operating temperature: +200°C max
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK07
- Class I
- Power consumption: 120 W
- T°C with incandescent wires: non-flammable
- Vibration resistance: Meets the severe application requirements of the standard EN 60598-1 (tested according to CEI 60068-2-6)
- Weight: 5 kg
- Designed and made in France