




Description

- COULOMB 100 self-contained tubular emergency light fitting
- End-caps ½ ring press-formed
- Ø100 mm cristal quality polycarbonate diffuser
- Gear tray fixed on the end cap supporting the cable entry, high reflectance aluminium front mask and window with a special LED satin finish polycarbonate diffuser
- NiMH battery
- Moulded EPDM gaskets
- EN 60 598-2-22, compliant to French emergency standard NF AEAS SATI, for not maintained emergency exit lighting
- 1 hour autonomy


Light specifications and controlling

- Assigned flux: 45 lm
- Colour temperature: 4000 K
- High-performance electronic LED module
- 230V 50Hz electronic module with integrated automatic test system (SATI) - Watch lighting and LED test controls

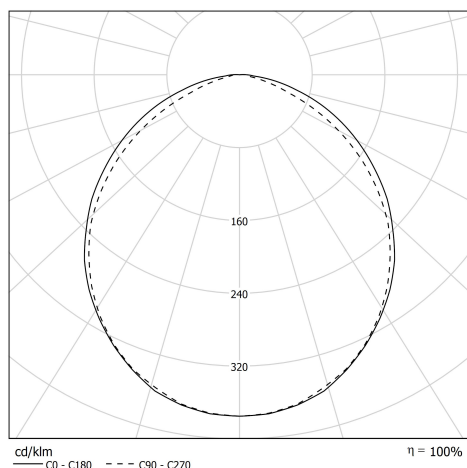

Installation and maintenance

- Diameter: 100 mm
- Total length: 357 mm
- 1 cable gland in nickel-plated brass (capacity: Ø5 to 14 mm)
- Connection to 5x2,5mm² terminal block
- 2 fixing straps in stainless steel with variable centre distance and allowing 360° orientation
- Maintenance by releasing the closing screw and extracting the diffuser

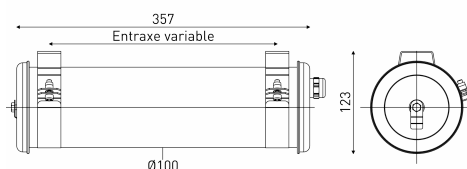

Characteristics

- Warranty : 5 years 24/7 use at max temp (excluding batteries)
- Operating temperature: 0°C +30°C
- Protection: IP68
- Resistance to IK shocks: IK10
- Class I
- Power consumption: 1,1 W
- Consumption: 0,5W on standby mode
- Power factor > 0,5
- T°C with incandescent wires: 960°C
- Weight: 1,6 kg
- Provided with universal labels
- Designed and made in France