




Description

- Brueghel low glare ceiling light fitting
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- The possible traces of scratches or lines specific to the plastic material extrusion are normal and are not resulting in a default of the product.
- End caps, fixing straps, ...: Stainless Steel 304L

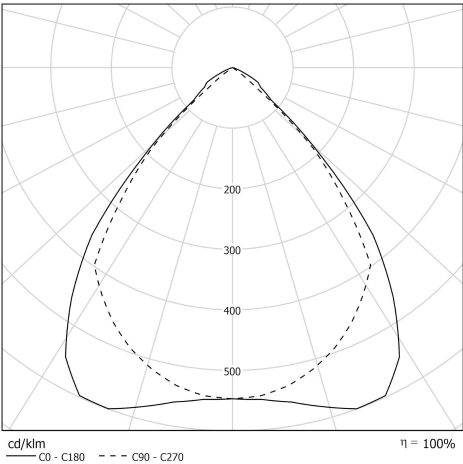


Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 2100 lm
- Colour temperature: 3000 K
- Specific satin-finish primary diffuser optic
- UGR ≤ 19 (Ceiling or suspended light fitting)
- Longitudinal glare control: 30°
- Transversal glare control: 30°
- Constant Current Driver (non-dimmable)

Installation and maintenance

- Diameter: 100 mm
- Total length: 1007 mm
- 13x1,5mm<sup>2</sup> disconnectable plug lockable with threaded ring for cable Ø 8 - 10 mm
- 2 Stainless Steel fixing straps (with variable centre distance)
- Opening of the product lighting part on the top
- Maintenance by releasing the 2 closing screws, removing the end cap and extracting the gear tray
- Easily removable LED modules and driver



Characteristics

- Warranty : 8 years
- 70 000 h L80/B10 at 25°C
- Operating temperature: -25 °C to +35 °C
- Imperviousness: IP66, IP68 and IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 18 W
- Luminous efficacy: 117 lm/W
- Power factor > 0,8
- THD: 24 %
- Photobiological hazard: Group 0
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 3 kg
- Designed and made in France