




Description

- Brueghel low glare ceiling light fitting
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- The possible traces of scratches or lines specific to the plastic material extrusion are normal and are not resulting in a default of the product.
- End caps, fixing straps, ...: Stainless Steel 304L


Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 2400 lm
- Colour temperature: 3000 K
- Specific satin-finish primary diffuser optic
- UGR ≤ 19 (Ceiling or suspended light fitting)
- Longitudinal glare control: 30°
- Transversal glare control: 30°
- Constant Current Driver (non-dimmable)

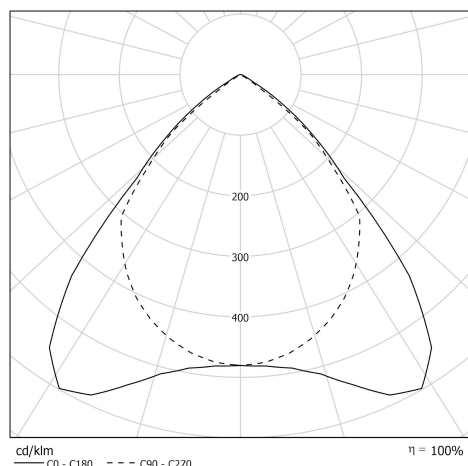

Installation and maintenance

- Diameter: 133 mm
- Total length: 987 mm
- 13x1,5mm² disconnectable plug lockable with threaded ring for cable Ø 8 - 10 mm
- 2 Stainless Steel fixing straps (with variable centre distance)
- Opening of the product lighting part on the top
- Maintenance by releasing the 2 closing screws, removing the end cap and extracting the gear tray
- Easily removable LED modules and driver

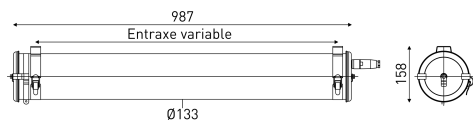

Characteristics

- Warranty : 8 years
- 70 000 h L80/B10 at 25°C
- Operating temperature: -20 °C to +35 °C
- Imperviousness: IP66, IP68 and IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Supply voltage: 220-240V 0/50/60Hz
- Power consumption: 20 W
- Luminous efficacy: 120 lm/W
- Power factor > 0,85
- THD: 23 %
- Inrush current - Ipeak: 32 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 240 µs
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 3,8 kg
- Designed and made in France

