



Direct/Indirect low glare ceiling light fitting


Description



- Brueghel Direct/Indirect low glare ceiling light fitting
- Internal anodized finishing aluminum gear unit cover : SILVER
- Housing: borosilicate-glass diffuser for inside/outside use
- End caps, fixing straps, ...: Stainless Steel 304L

Light specifications and controlling

- High-efficiency removable LED modules (IRC>90, 3 SDCM)
- Light Flux : 3200 lm total with 1100 lm in indirect
- Colour temperature: 3000 K
- Specific satin-finish primary diffuser optic
- UGR \leq 19 (Ceiling or suspended light fitting)
- Longitudinal glare control: 30°
- Transversal glare control: 30°
- No light pollution for outdoor lighting: ULR = 0% - Max. orientation for ULR < 4%: 45° in horizontal position - FC3 = 100%
- Equipped with 2 constant current output drivers to switch on direct and indirect light both or separately - 1 luminary, 3 ambiances-DALI-addressable driver, 2 addresses

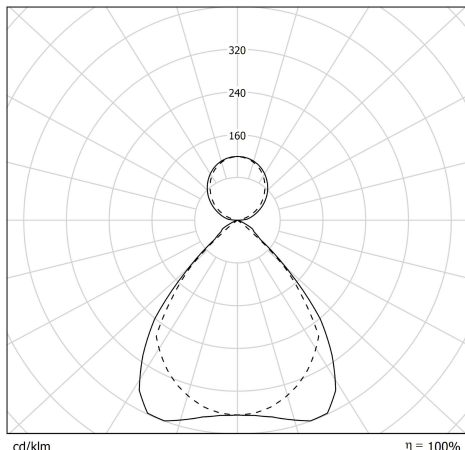


cd/klm
— C0 - C180 --- C90 - C270

$\eta = 100\%$

Installation and maintenance

- Diameter: 100 mm
- Total length: 1007 mm
- Cable entry with nickel-coated brass cable gland for cable \varnothing 5 - 14 mm
- Connection to a 5 x 2.5 mm² disconnectable terminal block
- 2 Stainless Steel fixing straps (with variable centre distance)
- Provided with 2 suspension kits including: A ceiling-mounting system, 3m of \varnothing 1.2mm steel wire and self-locking adjustable fixing system for bolt fitted fixing strap
- Maintenance by releasing the 2 closing screws, removing the end cap and extracting the gear tray
- Easily removable LED modules and driver



Characteristics

- Warranty : 8 years
- 70 000 h L80/B10 at 25°C
- Operating temperature: -25 °C to +35 °C
- Imperviousness: IP66, IP68 and IP69K
- Resistance to IK shocks: IK07
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 32 W
- Photobiological hazard: Group 0
- T°C with incandescent wires: non-flammable
- Weight: 4,8 kg
- Designed and made in France

